

Single Package Vertical Air Conditioners

Best Hotel Products™

PTACS • FURNITURE • TVs • MATTRESSES • APPLIANCES

847-749-0800

www.besthotelproducts.com



FRIEDRICH

1883

Vert-I-Pak®

Installs easily in a closet for quiet operation and provides a more homelike appearance for your guests.



THE EXPERTS IN ROOM AIR CONDITIONING



A Better Solution for Hospitality & Multi-Family Suites

Ducted and centrally-located, the Vert-I-Pak eliminates the need for multiple through-the-wall units.



Vert-I-Pak® advantages

- Easy to install
- Higher efficiencies
- Quieter operation
- Certified by AHRI
- Diamonblue Advanced Corrosion Protection® standard on the coil

1 YR.
WARRANTY
PARTS AND LABOR

5 YR.
LIMITED WARRANTY



Better Aesthetics

Outdoors

Packaged unit eliminates the clutter of outdoor condensing units and the sleek architectural grille is available in custom colors to match the building's exterior.

Indoors

All the guest sees is a thermostat.



A quiet and energy efficient option for extended stay properties, suites, assisted living, student housing, and commercial spaces.

VERT-I-PAK® IS A SUPERIOR PRODUCT


What you'll find on Friedrich Vert-I-Pak®	What you'll find on many competitor's products
<ol style="list-style-type: none"> 1. Floating chassis design slides into a wall plenum and is held firmly in place by a sealing gasket, reducing noise from vibration transfer. 2. ½ inch foil-backed insulation added on the inside of the chassis to reduce sound transmission into the guest room. 3. Efficiencies above industry standards with EERs up to 10.5. 4. Condensate removal system uses slinger ring technology to cool the coil and increase efficiency. 5. Dynamically balanced blower with large, vibration-absorbing motor mounts for smooth and quiet operation. 6. Patented telescoping plenums (accessory) easily adapt to more installations. 7. 5 year limited warranty includes labor. 	<ol style="list-style-type: none"> 1. Chassis is screwed into the wall plenum. Metal-on-metal contact transfers vibration, increasing operating noise under typical conditions. Noise is transferred through the walls and into the room. 2. No insulation on the unit to reduce noise transmission into the guest room. 3. Hard plastic feet on the unit base which are less durable and transfer harsh vibration noise. 4. Different plenums needed based on varying wall depths. 5. No labor warranty.

Friedrich engineered for quieter performance

Unique installation method. Superior insulation for reduced sound levels.

FRIEDRICH'S 'FREE FLOATING' DESIGN

The chassis slides into the wall plenum and a gasket firmly seals the chassis to the patented telescoping plenum. This eliminates vibration noises that are transmitted into the room in competitor's metal-on-metal fixed installations. Extra thick, vibration-absorbing rubber grommets mounted on durable base that is engineered for structural and acoustic integrity.



Foil-backed, 1/2" insulation blanket inside the cabinet reduces sound transmitted into the guest room

Reliable and durable

- PSC permanently lubricated motor for low maintenance and maximum efficiency
- Engineered drain pan won't rust, eliminating the risk of unsightly rust stains from condensation on the building exterior
- Painted, 18-gauge galvanized steel cabinet resists corrosion
- Standard safety power disconnect
- Electronic control panel on unit for easy diagnostics and servicing
- 100% run tested prior to shipment- Every unit is tested in every operating mode before it ships for optimal performance and reliability


DIAMONBLUE
 Advanced Corrosion Protection.



Protects the outdoor coil against deterioration and extends the life of the unit especially in harsh coastal environments.

Easy installation

- Can be installed from any interior side (front, right or left)
- Ductable to multiple rooms
- Compact and lightweight, weighs as little as 125 lbs.
- Installation does not require an HVAC technician
- Prewired, charged and piped
- All units are ready to install with only electrical hook up needed to be up and running
- 10" crimped and beaded duct-collar ready to attach flex duct
- Patented telescoping wall plenums adjust to fit varying exterior wall thicknesses
- Primary condensate removal system provided thru 3/4" pipe fittings for more placement options
- Secondary overflow from primary drain*
- Central desk control ready

- 24-volt remote wireless or wired thermostat ready
- All units are shipped (on pallet) with return air filter

Energy management thermostats available

- Wired and wireless thermostats
- Integrated occupancy sensor
- Auto changeover
- 5 distinct energy presets
- Comprehensive remote management capability**



* 24000 Btu model uses secondary gravity-fed drain

** Energy management capability requires purchase of additional hardware and service fee

A better heating and cooling option inside and out

- Eliminates the clutter of outdoor condensing units and the need for vandalism barriers.
- Completely self-contained
- No refrigerant lines running from floor to floor
- Fast, easy replacement keeps spaces livable

Improved guest comfort

- Individually controlled
- Heat and cool
- Duct air specifically where it's needed, not just on the outside wall
- 2-speed fan with constant fan option on Friedrich RT6 and WRT1 thermostats

A better choice than whole building solutions

- Lower installed cost
- Independent metering (no need to prorate for multitenant applications)
- Individual temperature set point (one unit can heat and others can cool)
- Less risk, with a whole building system spaces may become uninhabitable until the system is repaired or replaced
- Vert-I-Paks can be easily accessed for maintenance or replacement



Installs in a small mechanical closet and can be ducted to multiple rooms.


Electric Heat

COOLING
8600-23000 Btu
Up to 10.5 EER
ELECTRIC HEAT
2500-10000 Btu

Heat Pump

COOLING
8600-23000 Btu
Up to 10.5 EER
HEATING
8000 -20000 BTU
All 3.0 COP

TYPICAL VERT-I-PAK® INSTALLATION

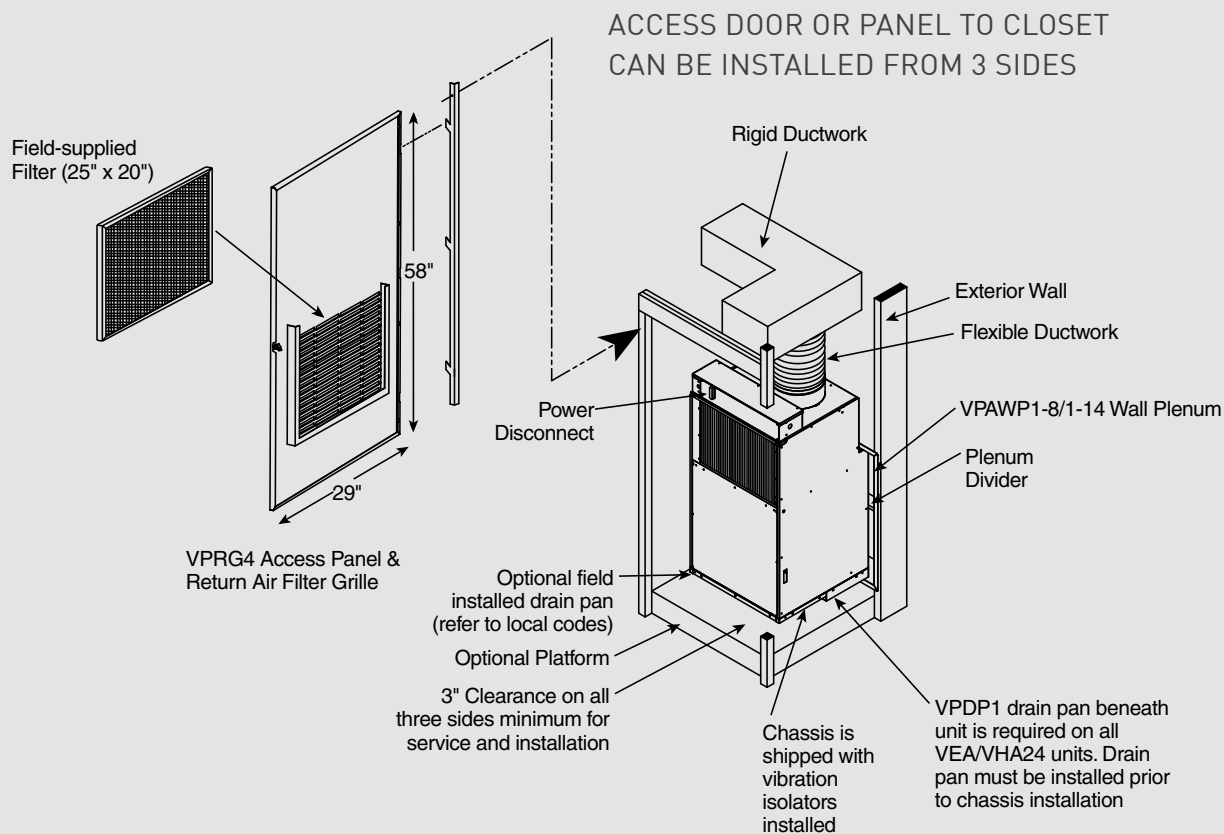

Easily replace older First Company vertical units*

Vert-I-Pak® is an exact fit for existing First Company SPXR-series single package vertical units when installed with the VPASA1 Sleeve Adapter.



Sleeve Adapter Kit

SINGLE-PIECE welded adapter for a rigid installation

NO EXPENSIVE CUTTING or RE-SIZING of wall opening necessary



EXACT FIT to First Company sleeve

EASY CONNECTION to Friedrich chassis

SAVE ON ENERGY COSTS WITH HIGHER EFFICIENCY VERT-I-PAK® UNITS

Friedrich Vert-I-Pak		First Company
9000 Btu A/C	10.5 EER	9.0 EER
12000 Btu A/C	9.8 EER	9.0 EER
18000 Btu A/C	9.0 EER	9.0 EER

9000 Btu HP	10.5 EER	9.0 EER
12000 Btu HP	9.7 EER	9.0 EER
18000 Btu HP	9.1 EER	9.0 EER



Friedrich Vert-I-Pak

Replaces First Company SPXR Series



IMPORTANT FEATURE COMPARISONS

Feature	Friedrich Vert-I-Pak	First Company
ARI Certification	YES	NO
Warranty	1st Year Bumper to Bumper, Parts & Labor. 2nd - 5th Year Sealed Refrigeration System, Parts & Labor	1st Year Parts Only. 2nd Year Compressor, Parts Only
Corrosion Protection	Standard	Not Available
Weight	114 Lbs. to 167 Lbs.	245 Lbs. to 255 Lbs.

Service/Support

- Dedicated Service/Sales/Order Support based in San Antonio, TX
- Ability to set up installer as warranty service agent
- Over 1,500 independent service agents throughout the U.S.

* First Company unit is also sourced by Amana and Carrier.

Closest dimensional limitations apply. Sleeve adapter kit includes all parts necessary to mate with First Company sleeve.

Optional Accessories

ARCHITECTURAL LOUVER

VPAL2 and VPSC2

Extruded aluminum grille that attaches to the outdoor section of the wall plenum. Takes in fresh air and returns condensed air. VPSC2 can be ordered in custom colors.

DIMENSIONS: 25 9/16" W x 31 1/16" H

WALL PLENUM

VPAWP1-8, VPAWP1-14

Two-part sleeve that telescopes in and out. Sits inside the exterior wall penetration.

VPAWP1-8 telescopes from 5 1/2"-8"

VPAWP1-14 telescopes from 8"-14"

DIMENSIONS: 24 1/8" W x 30 3/8" H

CUTOUT DIMENSIONS: 24 5/8" W x 30 7/8" H

RETURN AIR GRILLE/ ACCESS PANEL

VPRG4

Hinged panel allows access to unit and return air filter.

A field-supplied filter (25" x 20") should be mounted on the inside grille.

Panel can be mounted with return air openings high or low on the door for optimum sound attenuation.

DIMENSIONS: 29" W x 58" H

CUTOUT DIMENSIONS: 27" W x 55 3/4" H

FIRST COMPANY SLEEVE ADAPTER

VPASA1

Single piece, welded adapter allows retrofit into existing First Company SPXR-series single package vertical unit wall sleeve and louver. Easy connection to Friedrich chassis.

SINGLE STAGE THERMOSTATS

RT6

Wired, single stage, wall-mounted digital thermostat with two fan speeds and backlight for control of Friedrich VERT-I-PAK.

WRT1

Wireless, single stage, wall-mounted digital thermostat with two fan speeds and backlight for control of Friedrich VERT-I-PAK.

ENERGY MANAGEMENT THERMOSTATS

EMRT1

Wired thermostat with occupancy sensor.

EMWRT1

Wireless thermostat with occupancy sensor.

EMOCT

Online connection kit.

EMRAF

Remote access fee.

DRAIN PAN

VPDP1

For VEA/VHA24 models. May be installed prior to chassis for easy installation/removal.



RT6



WRT1



EMRT1, EMWRT1



SPECIFICATIONS

MODEL	VEA09K	VEA12K	VEA18K	VEA24K	VHA09K	VHA09R	VHA12K	VHA12R	VHA18K	VHA24K										
COOLING DATA																				
COOLING BTU	9000/8600	11500/11200	17000/16500	23000/22700	9000/8600	8900	11500/11200	12000	17000/16800	23000/22800										
POWER (W)	857/819	1174/1143	1889/1833	2421/2389	857/819	908	1186/1155	1224	1886/1846	2527/2505										
EER	10.5/10.5	9.8/9.8	9.0/9.0	9.5/9.5	10.5/10.5	9.8	9.7/9.7	9.8	9.1/9.1	9.1/9.1										
SENSIBLE HEAT RATIO	0.74	0.74	0.70	0.70	0.74	0.74	0.74	0.72	0.70	0.70										
HEATER SIZE	2.5/3.4/5.0	2.5/3.4/5.0	2.5/3.4/5.0	2.5/3.4/5.0/7.5/10.0	2.5/3.4/5.0	2.5/3.4/5.0	2.5/3.4/5.0	2.5/3.4/5.0	2.5/3.4/5.0	2.5/3.4/5.0/7.5/10.0										
HEAT PUMP DATA																				
HEATING BTU	—	—	—	—	8200/8000	8700	11000/10800	11500	16000/15000	20000/20000										
COP @ 47F	—	—	—	—	3.0/3.0	3.0	3.0/3.0	3.0	3.0/3.0	3.0/3.0										
HEATING POWER (W)	—	—	—	—	801/782	850	1055/1075	1123	1560/1540	1953/1953										
HEATING CURRENT (A)	—	—	—	—	3.6/3.9	3.4	4.5/4.7	4.4	7.5/8.2	8.5/9.4										
ELECTRICAL DATA																				
VOLTAGE (1 PHASE, 60 HZ)	230/208	230/208	230/208	230/208	230/208	265	230/208	265	230/208	230/208										
VOLT RANGE	253-197	253-197	253-197	253-197	253-197	239/292	253-197	239/292	253-197	253-197										
COOLING CURRENT (A)	4.0/4.3	5.0/5.4	8.1/8.6	10.0/10.4	4.0/4.3	3.6	5.0/5.4	5.0	8.2/8.6	10.6/10.9										
AMPS L.R	21.0	29.5	42.0	46.0	21.0	16.5	29.5	23.5	42.0	46.0										
AMPS F.L.	3.5	4.5	7.8	9.5	3.5	3.1	5.0	4.3	7.8	9.5										
INDOOR MOTOR (HP)	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4										
INDOOR MOTOR (A)	1.2	1.2	1.2	1.94	1.2	1.08	1.2	1.08	1.2	1.94										
OUTDOOR MOTOR (HP)	—	—	—	1/4	—	—	—	—	—	1/4										
OUTDOOR MOTOR (A)	—	—	—	0.85	—	—	—	—	—	0.85										
PHYSICAL																				
DIMENSIONS (W X D X H)	23"X23"X32"	23"X23"X32"	23"X23"X32"	23"X23"X47"	23"X23"X32"	23x23x32	23"X23"X32"	23x23x32	23"X23"X32"	23"X23"X47"										
NET WEIGHT (LBS)	114	124	144	167	114	114	125	124	144	167										
SHIPPING WEIGHT (LBS)	125	135	155	220	125	125	135	135	155	220										
TEST SETTING	LOW	LOW	HIGH	LOW	LOW	LOW	LOW	LOW	HIGH	LOW										
R410A CHARGE (OZ)	41.5	45	48.1	65	38	39	39	37	48	65										
AIRFLOW DATA																				
INDOOR CFM*	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
.10" ESP	405	450	420	450	400	480	610	700	420	450	420	450	420	450	420	450	400	480	610	700
.15" ESP	375	420	405	425	375	465	585	670	405	425	405	425	405	425	405	425	375	465	585	670
.20" ESP	345	385	385	400	350	450	560	640	385	400	385	400	385	400	385	400	350	450	560	640
.25" ESP	325	365	355	375	330	390	535	610	355	375	355	375	355	375	355	375	330	390	535	610
.30" ESP	305	340	320	350	310	330	510	580	320	350	320	350	320	350	320	350	310	330	510	580
VENT CFM	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60	60

NOTES:

COOLING STANDARDS: 95°F DB/75°F WB OUTDOOR, 80°F DB/67°F WB INDOOR
 HEATING STANDARDS: 47°F DB/43°F WB OUTDOOR, 70°F DB/60°F WB INDOOR
 NORMAL VALUE WET COIL @ .1" ESP.

RATED CFM AT LOW SPEED: VEA09/VHA09.....325 VHA12/VEA12.....390
 VEA18/VHA18.....400 VEA24/VHA24.....610

DUE TO CONTINUING RESEARCH IN NEW ENERGY-SAVING TECHNOLOGY,
 SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Friedrich Air Conditioning Co. | 10001 Reunion Place, Suite 500 | San Antonio, TX 78216